

# ICR-611WDR-W ICR-611WDR-B




**Manual**

# INSTALLATION

## Dimensions




**FRONT**

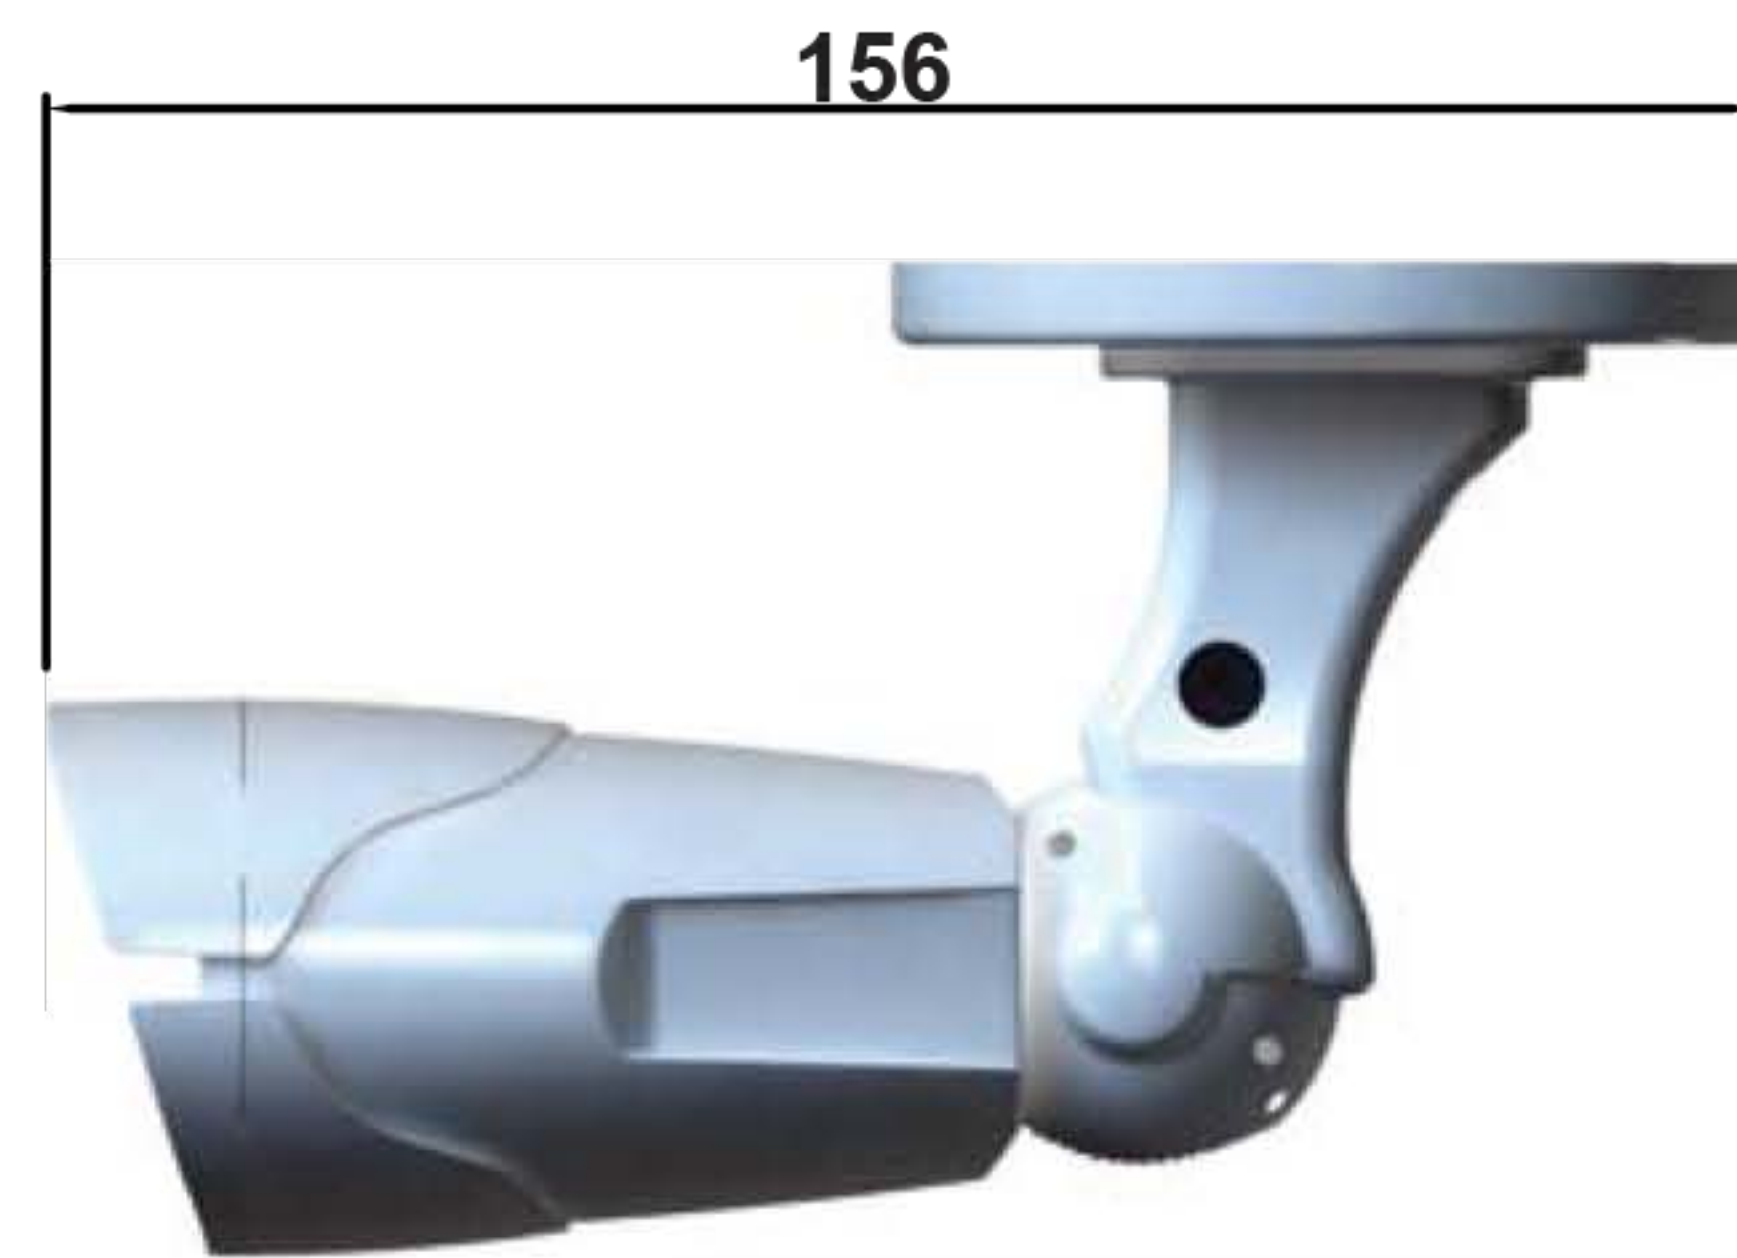

**SIDE**

## How to Install

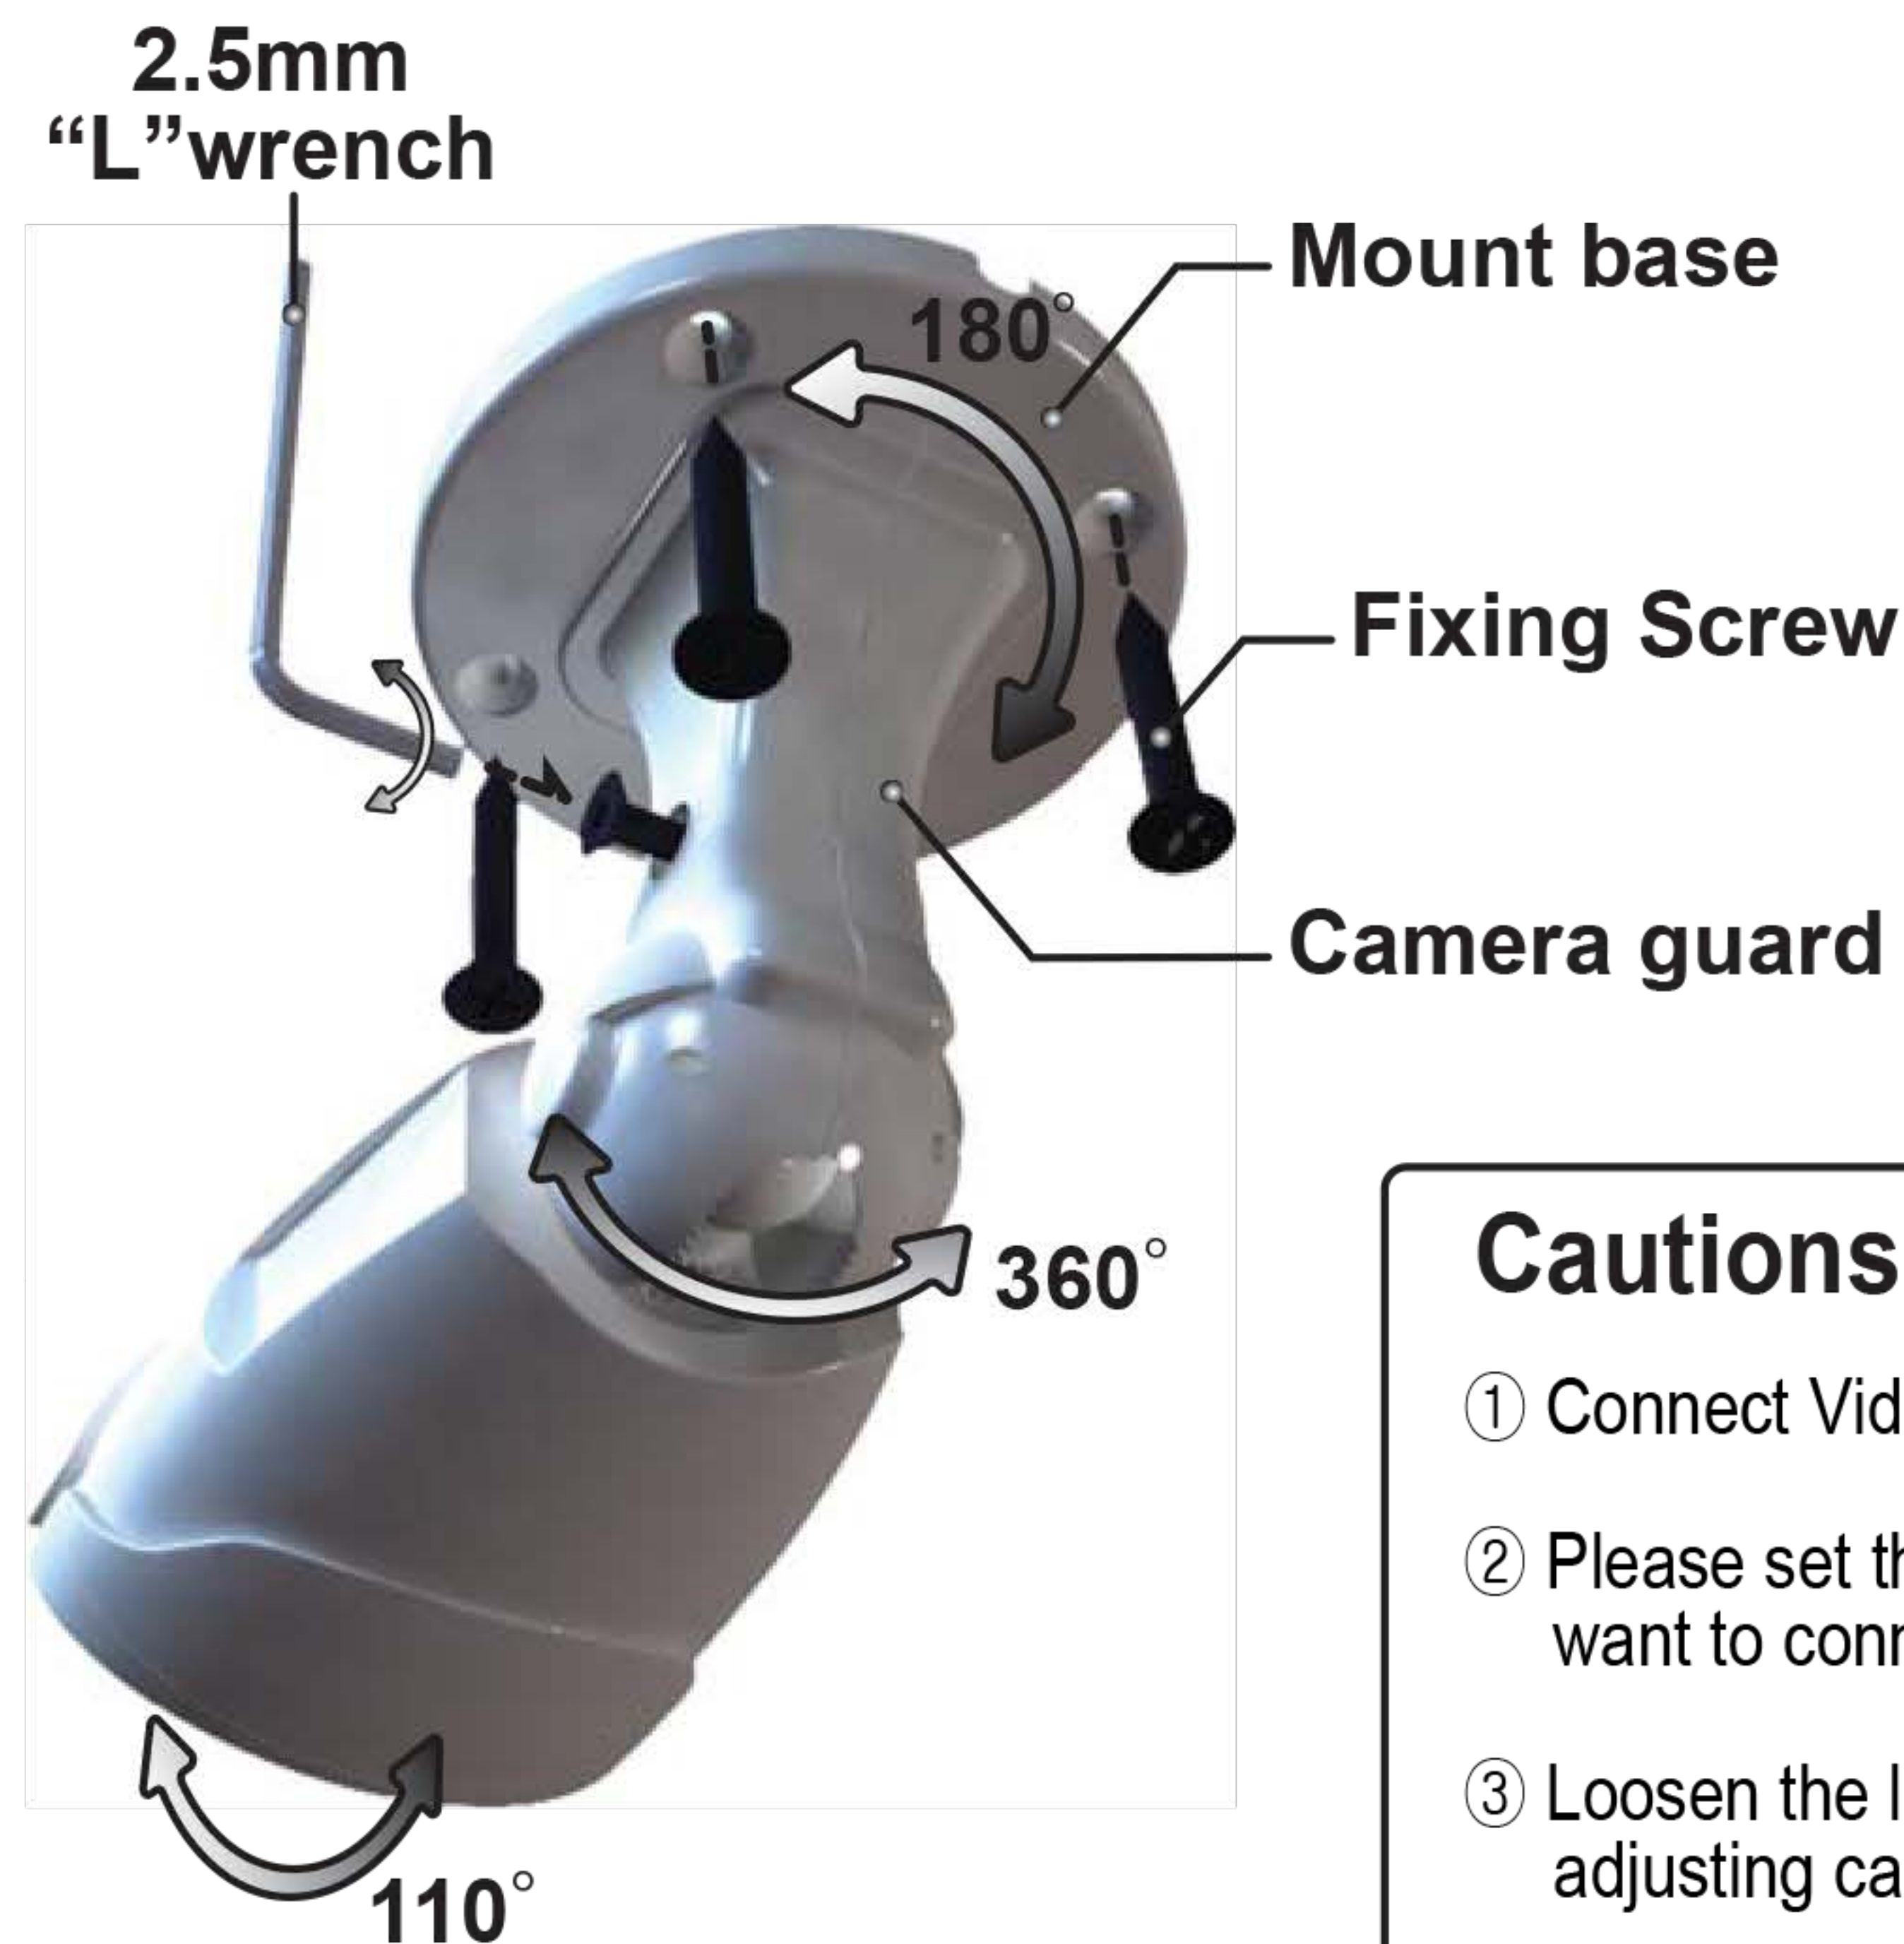

### Cautions

- ① Connect Video & Power Line
- ② Please set the position where you want to connect the camera.
- ③ Loosen the locking screws and adjusting camera angle.
- ④ Combine each camera parts and lock & tight the each locking screws.

# SPECIFICATION

MODEL	ICR-600WDR-IRB-W / ICR-600WDR-IRB-B	
TV System	NTSC	PAL
Imaging Device	1/3" Color CCD	
Total Pixels	811(H) x 508(V)	795(H) x 595(V)
Effective Pixels	768(H) x 494(V)	752(H) x 582(V)
Scanning System	2:1 Interlace	
Synchronization	Internal	
Horizontal Resolution	600TV lines	
Video Output	1Vp-p Composite 75Ω	
S/N ratio	52 dB (AGC Off / Weight ON)	
Min.Illumination	0.01Lux (F1.2, 5 IRE)	
SHUTTER	AUTO / MANUAL 1/60~1/120,000sec	AUTO / MANUAL 1/50~1/120,000sec
BLC	Factory Default	
Day & Night	Auto Switching	
Gain Control	Factory Default	
White Balance	ATW / OUTDOOR / INDOOR / MANUAL / AWC (1,700°K ~ 11,000°K)-Factroy Default	
Privacy Masking	ON / OFF (Programmable 8 zones)-Factroy Default	
DNR	ON	
Sharpness	ON	
Visible Range (LED on)	Indoor	25m ( IR LED 5pie -24EA )
	Outdoor	20m ( IR LED 5pie -24EA )
Lens	4mm Fixed Board Lens	
Power Source	DC 12V(±10%)	
Power Consumption	500mA Max.	
Operating Temperature	-20C° ~ +60C° , RH95% Max	
Dimension(mm)	80(W)mm x 92(H) x 156(D)mm	
Weights	305g	