




CAUTION

RISK OF ELECTRIC SHOCK
DO NOT OPEN




CAUTION : TO REDUCE THE RISK OF ELECTRIC SHOCK,
DO NOT REMOVE COVER
NOT USER SERVICEABLE PARTS INSIDE
REFER SERVICING TO QUALIFIED SERVICE PERSONNEL

Dimensions

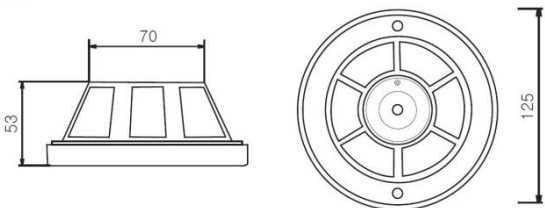


Cable

Basic Cable




Installation


Step.1



Step.2-1



Step.2-2



Specifications

TV System	NTSC		PAL
Number of Pixels	H	976	976
	V	494	582
Scanning Frequency	H	15.734KHz	15.625KHz
	V	59.94Hz	50Hz
Horizontal Resolution	Color	700 TV Line	
Image Pick-up Device	1/3" Sony Super HAD II Color CCD		
Scanning System	2:1 Interlace		
S/N Ratio (AGC Off)	More Than 52dB		
Min. Sensitivity	0.1 Lux (F 1.2)		
Gamma Correction	0.45 Approx.		
Gain Control	Automatic		
Video Output	Composite Video 1.0Vp-p/75Ω		
Lens	Pinhole Lens 3.7mm		
Power Source	DC 12V 500mA Regulated Power Supply		
Power Consumption	MAX 2.0W		
Operating Temp.	-10°C ~ +50°C		
Dimensions (mm)	125mm(D) X 53mm(L)		
Weight/g	130g		

Accessories



Screws



CAUTION ! Please Use regulated power supply DC12V 500mA
Reverse Polarity Protection